


Product Specification Sheet

Product name – Oct-O-Mat Anti Fatigue Mat

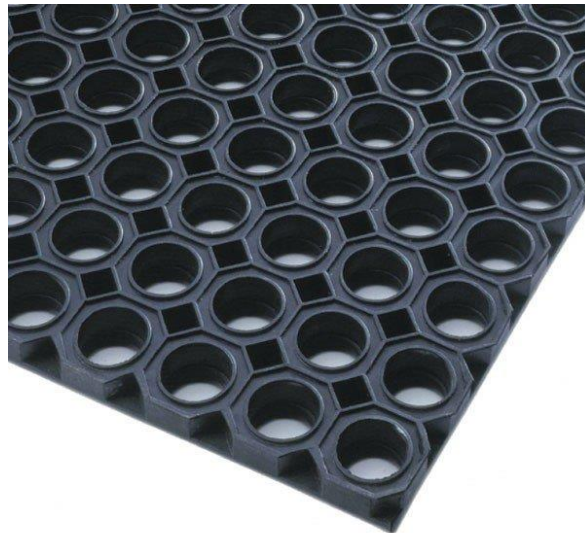

PRODUCT SPECIFICATIONS	
Designation	Dust Control Matting
Type	Non-absorbent/ scrape rubber mat
Description	Octogonal ring design with open construction
Material	Natural rubber compound
Process	Compression moulding
Category	Outdoor Non absorbent - Rubber classics
Recommended	use Outdoor - heavy foot traffic
Colours	Black
Weight	12,7 kg/m ²
Thickness	23 mm
Standard sizes	60 cm x 80 cm 75 cm x 100 cm 80 cm x 120 cm 100 cm x 150 cm
Custom sizes	Per m ²
Special remarks	Suitable for use under extreme weather conditions Accessories: Connectors, Insert brushes

Ireland:
B2 Athy Business Campus
Athy, Co. Kildare R14 PK74
Ph: 01 531 2777
Email: sales@pittman.ie

United Kingdom:
1310 Solihull Parkway, Birmingham Business Park
Birmingham B37 7YB
Ph: 0121 630 3527
sales@pittman.uk

PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance	ASTM D3884	
Colour fastness to light	AATCC 16E	
Accelerated wear test by sim floor machine	U.S	
Accelerated soiling	U.S.	
Anti-slip	DIN51130 BGR181	
Water retention	U.S	
Hardness	U.S	60 Shore A
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09

FIRE TESTING			
	Surface Flammability	ASTM D2859	
	Classification of the reaction to fire performance	DIN EN 13501-1	B1 on demand
Sustainability	<ul style="list-style-type: none"> • Recyclable material • REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) • Contributes to cleaner environment by reducing need of cleaning chemicals 		

Ireland:
 B2 Athy Business Campus
 Athy, Co. Kildare R14 PK74
 Ph: 01 531 2777
 Email: sales@pittman.ie

United Kingdom:
 1310 Solihull Parkway, Birmingham Business Park
 Birmingham B37 7YB
 Ph: 0121 630 3527
sales@pittman.uk