Product Code: 747004

XPT-50 SPEED BUMP KIT 50MM

Extremely durable traffic calming

pittman®

OVERVIEW

The XPT-50 Speed Bump Kit is built to provide long-lasting traffic control with minimal maintenance. Made from pure vulcanised rubber, it offers unmatched durability, ensuring it stands up to heavy traffic for years.

Its precision moulding delivers excellent tyre grip, making it reliable in any weather, from rain to snow. Installation is quick and straightforward, thanks to its bolt-down design with built-in connectors, ensuring a secure fit.

The highly visible cat eye reflectors in each mid-section enhance driver awareness, even at night. Plus, with its colour-fast properties, the speed bump maintains its vibrant appearance over time, keeping your roads or car parks looking professional and safe.

PRODUCT FEATURES

- > Ultimate durability made from 100% pure vulcanised rubber
- Precise moulding excellent tyre grip in all weather conditions
- Easy installation bolt-down design with integral connectors
- High visibility 2no. cats eyes on every mid-section
- Reduced fading colour fast to maintain design over time

TECHNICAL DATA


SPECIFICATION	BLACK MID- Section	YELLOW MID- Section	MALE END-CAP	FEMALE END-CAP
SKU:	747100	747101	747102	747104
Material:	100% Pure Vulcanised Rubber			
Color:	Black	Yellow	Yellow	Yellow
Height:	50mm			
Length:	500mm		200mm	
Depth (drive over distance):	400mm			
Fixings included:	4no. M10 x 110mm coachscrews 3no. M10 x 110mm coachscrews			
Applications:	Public roads, car parks, multi-storeys, schools, warehouses, loading bays			
Speed rating	15km/h / 10mph			



HEAVY-DUTY FIXINGS Suitable for concrete and tarmac installation



PRECISE MOULDING Long-lasting vulcanised rubber with ultimate tyre grip

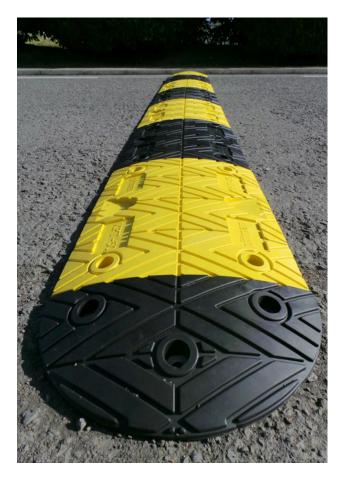

INSTRUCTIONS FOR USE

1. Choose the Installation Surface: The speed bump can be securely bolted into concrete or tarmac using the included M10 coachscrew sets.

2. Mark the Holes: Place the mid-section and end caps firmly on the ground in the desired position. Use the sections as a guide to mark the locations for the fixings.

3. Drill the Holes: Move the mid-section or end-cap aside and drill holes where you marked.

4. Install the sections: Line up each section with the drilled holes. Connect each setion or end cap into the next piece as necessary. Then, bolt it securely into place.

5. Ready for Use: Once installed, the speed bump is ready to use immediately.

pi<mark>tt</mark>man[®]